
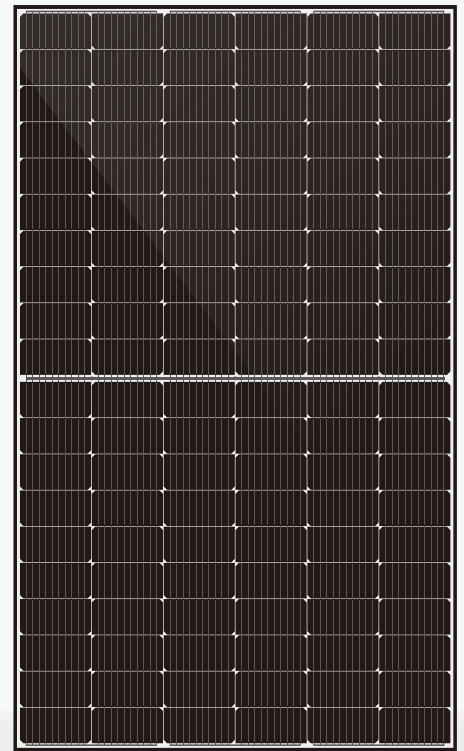


DHM-60X10

0~+5W

430~460W


Half-Cell High Efficiency PV Module



Quality Guarantee

12-Year material & technology warranty

25-Year linear power output warranty

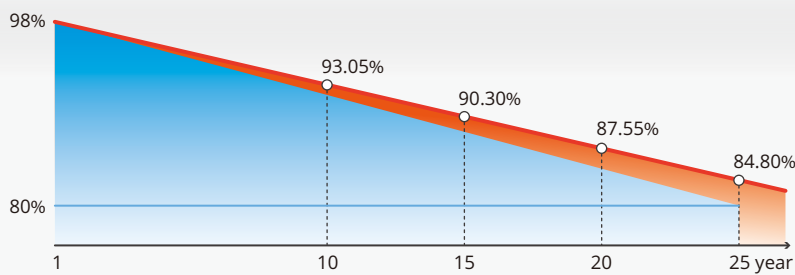

DAH solar linear power output guarantee

Standard linear power output guarantee



More Power Generation

Larger size of light receiving area and higher module conversion efficiency



10 Busbar Technology

Higher power collection density improves power generation



Stable Generation Performance

Guaranteed 0~+5W positive tolerance and slower power attenuation:
first year ≤2%, 0.55% per year from 2-25



Higher Power Gains and Lower Losses

Excellent low irradiance performance and low shadow loss



Process Optimized and Upgraded

Lower risk of hot spot and stronger anti-PID ability



Strong Environmental Adaptability and Great Durability

Certified by Dust-Sand, Salt-Mist, Ammonia etc. weather resistance tests and enhanced mechanical load: wind load (2400 Pascal) and snow load (5400 Pascal)

Comprehensive

Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

OHSAS 18001-

2007/International standards for occupational health & safety

ISO 14001-


2015/Standards for environmental management system

ISO 9001-

2015/Quality management system

DHM-60X10 430~460W

Design

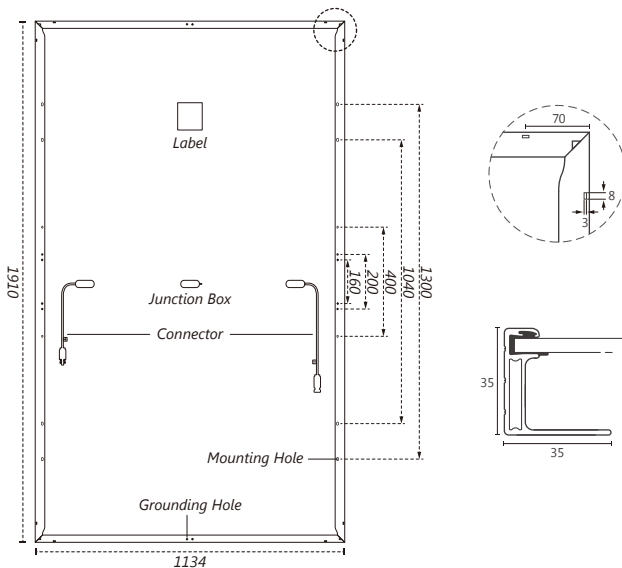

Mechanical Specification

Cells Type
Mono 182×91mm

Weight
24kg

Output Cable
(Including connector)
No. of Cells
Glass
Junction box
Connector

Dimension (L×W×T)
1910×1134×35mm

Packing
31pcs/pallet, 744pcs/40HQ

4.0mm², 300/400mm in length,
length can be customized
120 (6×20)
3.2mm High Transmission, Antireflection Coating
IP68, 3 Bypass Diodes
MC4 Compatible

Operating Parameters

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	25A
Snow load, frontside	5400Pa
Wind load, backside	2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

STC-Electrical Characteristics

Module Type	DHM-60X10						
Maximum Power (Pmax)	430W	435W	440W	445W	450W	455W	460W
Open-circuit Voltage (Voc)	40.8V	41.0V	41.2V	41.4V	41.6V	41.8V	42.0V
Maximum Power Voltage (Vmp)	34.4V	34.6V	34.8V	35.0V	35.2V	35.4V	35.6V
Short-circuit Current (Isc)	13.42A	13.48A	13.54A	13.60A	13.66A	13.72A	13.78A
Maximum Power Current (Imp)	12.50A	12.57A	12.64A	12.71A	12.78A	12.85A	12.92A
Module Efficiency (%)	19.85%	20.08%	20.31%	20.55%	20.78%	21.01%	21.24%
Temperature Coefficient of Isc	0.05%/°C						
Temperature Coefficient of Voc	-0.31%/°C						
Temperature Coefficient of Pmax	-0.35%/°C						

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Electrical Characteristics

Maximum Power (Pmax)	320W	324W	327W	331W	335W	339W	342W
Open-circuit Voltage (Voc)	38.3V	38.5V	38.6V	38.8V	39.0V	39.2V	39.4V
Maximum Power Voltage (Vmp)	32.6V	32.7V	32.9V	33.1V	33.3V	33.5V	33.7V
Short-circuit Current (Isc)	10.83A	10.88A	10.93A	10.97A	11.02A	11.07A	11.12A
Maximum Power Current (Imp)	9.83A	9.88A	9.94A	10.00A	10.05A	10.10A	10.16A

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve (DHM-60X10-440W)

